SSFM-100 Recirculating Brominator Systems



SSFM-100BC-SYS P/N 169090 Replaces P/N EV906404 SSFM-100BC-SYS P/N 169092 Replaces P/N EV906406

SSFM-100BC-SYS P/N 169094 Replaces P/N EV906408

BENEFITS

- Simple to operate No chemicals to mix
- Safe to handle Not a fire or explosion hazard
- Effective Disinfectant More effective across a broader pH range than chlorine
- Bromine is 4-10 times less noticeable in water than chlorine giving you better-tasting water
- Global service and parts availability
- Depended on by USN, USCG and offshore oil and gas rigs for safe, reliable water
- Recognized by the U.S. Navy as the safest, most reliable, and easy-to-use method of water disinfection aboard ship
- Requires no additional chemicals Bromine cartridges are ready to use and require just 30 seconds to change
- Automatically delivers bromine to water in a constant ratio
- Available as a non-magnetic unit for special applications



Super Water Disinfection Hazardous Areas Offshore





Everpure Bromine Cartridge P/N 255340-406 Replaces P/N EV954006

BROMINATION FOR SAFE, POTABLE WATER

Everpure recirculating bromine feeders add a predetermined quantity of elemental bromine into potable water tanks to ensure the potable water is bacteriologically safe for human consumption. Everpure recirculating bromine feeders add convenience to shipboard water treatment by allowing multiple tank treatment from one location.

Everpure is the original manufacturer of bromine feeders and the manufacturer of the patented Everpure Brominating Cartridge (NSN 4610-01-022-9970). Equipment manufactured by Everpure is installed aboard nearly every U.S. Navy surface warfare vessel, USCG Ships, USACE, NOAA, and numerous offshore oil, gas and production platforms. The Everpure Brominating Cartridge is recognized as the safest, most reliable, most effective and easy-to-use water disinfectant for marine applications; no more chemicals to mix, no fragile pumps and valves that clog, no flammable and/or explosive reactions with organics (fuel oils, paint,etc).

SPECIFICATIONS

Dimensions

14"W x 44"H x 201/4"D

Dry Weight

SSFM-100BC-SYS:	119 lbs. (54 kg)
SSFM-100CC-SYS:	133 lbs. (60.3 kg)
SSFM-100DC-SYS:	141 lbs. (64 kg)

ELECTRICAL REQUIREMENTS

The recirculating brominator feeder requires a 115 VAC power supply capable of supplying 1.5 amperes of current.

MOUNTING

The recirculating brominator feeder should be bulkhead mounted within reasonable proximity to the motor-pump and the line starter. A minimum of 13 inches overhead clearance is required above the feeder assembly for easy removal of the disposable bromine cartridge. For convenience, the instruction plate with operating procedure should be bulkhead mounted adjacent to the recirculating bromine feeder.

PLUMBING TERMINATIONS

Male quick disconnect coupling valve fittings are provided to mate with the installation kit hoses for interconnection to the motor-pump and potable water tank serviced.


ORDERING INFORMATION

BROMINATOR MODEL	PART NO.	REPLACES PART NO.	NO. OF TANKS SERVICED
SSFM-100BC-SYS	169090	EV906404	2
SSFM-100CC-SYS	169092	EV906406	3
SSFM-100DC-SYS	169094	EV906406	4

INSTALLATION KITS

In addition to your recirculating brominator, a separately ordered motor-pump, line starter and installation kit are required to make up the system. The installation kit comes complete with interconnecting hoses and fittings.

BROMINATOR MODEL NO.	INSTALLATION KIT PART NO.	REPLACES PART NO.
SSFM-100BC-SYS	169085	EV906332
SSFM-100CC-SYS	169086	EV906333
SSFM-100DC-SYS	169087	EV906334

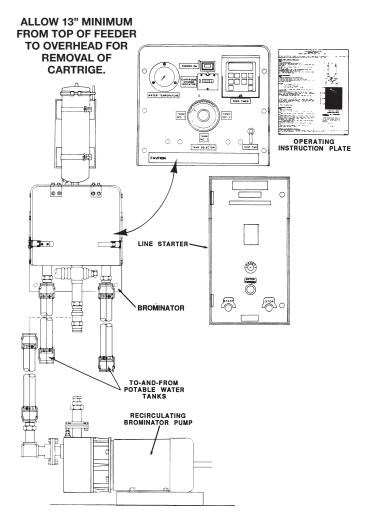

NOTES

A potable water storage tank should be treated whenever it is filled from a shore source, or whenever there is no measurable bromine residual in the tank. A measurable bromine residual will insure the water is safe to drink.



Pentair Filtration, Inc.

502 Indiana Avenue - P.O. Box 1047 Sheboygan, Wisconsin 53082-1047 Phone 866.873.7506 Fax 888.203.7361 International Phone 920.457.9435 International Fax 920.457.2417 www.everpure.com

©2007 Pentair Filtration, Inc. 340019 AU07